

AP361

Outdoor Enterprise Middle Range Wi-Fi 6 (802.11ax) Access Point

HAN AP361 is a global enterprise level middle range Wi-Fi 6(802.11ax) outdoor AP, got the first Wi-Fi 6 certification on outdoor AP, 2.4GHz & 5GHz dual-band, six Spatial Streams, 5GHz 4*4:4 +2.4GHz 2*2:2 UL/DL MU-MIMO & OFDMA, dedicated 2.4GHz/5GHz scanning radio, BLE5/Zigbee(802.15.4), 2.5GE or SFP uplink, GE downlink with up to 802.3at PSE, integrated omni antenna or integrated directional antenna, or external antenna. Provides 2.97Gbps high throughput and up to 1024 users, better service higher density of clients, deliver more capacity for bandwidth hungry and latency sensitive voice and video clients, ideal for your high quality outdoor wireless requirement.



AP361 supports a maximum concurrent data rate of 2.975Gbps (2.402Gbps in 5GHz and 573Mbps in 2.4GHz), six spatial streams (2SS in 2.4GHz and 4SS in 5GHz), 160(80+80)MHz channels (HE80), and all Wi-Fi 6 (802.11ax) features, UL/DL MU-MIMO, UL/DL OFDMA, BSS color, etc. Enables faster speeds, more capacity, and efficient airtime allocation for clients on both 2.4Ghz and 5Ghz Wi-Fi bands.

Featuring enhanced WLAN technology with RF Radio Dynamic Adjustment, a distributed control Wi-Fi architecture, secure network admission control with unified access, built in application intelligence and analytics, making it ideal for enterprises of all sizes demanding a simple, secure and scalable wireless solution.

AP361 has integrated support for BLE5/Zigbee(802.15.4), making it ideal for broad scope of IoT end-points and applications.

Wi-Fi 6(802.11ax) Features

Wi-Fi 6(802.11ax) allows enterprises to deliver high performance wireless LAN services with increased throughput, enabling more clients in dense environments and bringing power efficiency to Internet of Things (IoT) devices, while it remains fully backward compatible with existing 802.11 a/b/g/n/ac deployments. Some of the key features enabled on AP361 series are:

- Orthogonal frequency division multiple access (OFDMA) enables more clients to simultaneously operate in the same channel and thereby improving efficiency, latency, and throughput. OFDMA can concurrently address multiple clients in both directions downlink (DL) and uplink (UL), including full 37 OFDMA Resource Units (RUs). OFDMA is very effective in



environments where there are many devices with short frames demanding lower latency.

- Multi-user multiple input, multiple output (MU-MIMO) allows more data to be transferred at once and enables an access point to handle a larger number of concurrent clients. This capability was introduced with 802.11ac, but now with 802.11ax the multi-user performance can be concurrently delivered in both directions downlink (DL) and uplink (UL).
- 1024 quadrature amplitude modulation mode (1024-QAM) boosting peak data-rates by as much as 25 percent.
- BSS Coloring improves spatial reuse in dense environments by providing a mechanism for color coding different overlapping BSS's, allowing more simultaneous transmissions.
- Extended Range (ER) provides increased coverage in scenarios where receiving side encounters high path loss and channel delay spread, especially in outdoor environments.
- Target wake time (TWT) makes Wi-Fi 6 devices more power efficient. This capability lets client devices to sleep much longer, and wake up to less contention, extending the battery life of smart phones, IoT sensors, and other devices.

Plug-and-play deployment

The AP361 works in a fully redundant cluster architecture to provide simplified plug-and-play deployments. The access point (AP) cluster is an autonomous system that consists of a group of HAN APs and a virtual controller, which is a

selected access point for cluster management. One AP cluster supports up to 255 APs.

The access point cluster architecture ensures simplified and quick deployment. Once the first AP is configured using the configuration wizard, the remaining APs in the network will come up automatically with updated configuration. This ensures that the whole network is up and functional within a few minutes.

Network Management Platform deployment

The AP361 can be managed by HAN CSP (Cloud Service Platform) or HAN ESP (Enterprise Service Platform). APs are managed as one or more AP Groups (a logical grouping of one or more access points). The HAN Network Management Platform embeds a visionary controller-less architecture, providing user friendly workflows for WLAN management together with integrated Authentication Manager which helps define authentication strategy and policy enforcement for Employees, Guest and BYOD devices. The network administrator can obtain a comprehensive view of applications running in the network and apply adequate control to optimize the performance of the network for business critical applications. Management platform provides advanced options for RF Management, wIDS/wIPS for intrusion detection and prevention.

Quality of service for unified communication apps

The AP361 supports fine tuned, quality of service (QoS) parameters to

differentiate and provide appropriate QoS for each application such as voice, video and desktop sharing. Application aware RF scanning avoids interruption of real-time applications.

Integrated guest management

The AP361 supports role based management access to the AP cluster which includes Admin, Viewer and GuestOperator access. The GuestOperator access simplifies guest account creation and management, and therefore can be used by any non-IT person, such as a receptionist. The AP361 also supports a built-in customizable captive portal which enables customers to offer unique guest access.

RF management

Radio Dynamic Adjustment (RDA) technology automatically assigns channels and power settings, provides DFS/TPC, and ensures that access points stay clear of all radio frequency interference (RFI) sources to deliver reliable, high-performance wireless LANs. The AP361 support dedicated scanning radio, or can be configured to part-time air monitoring for spectrum analysis and wireless intrusion protection.

Product specifications

Radio specification

- AP type: Outdoor, dual radio, 5 GHz 802.11ax 4x4:4 and 2.4 GHz 802.11ax 2x2:2
- 5 GHz: Four spatial stream DL/UL MU-MIMO for up to 2.402 Gb/s wireless data rate
- 2.4 GHz: Two spatial stream DL/UL MU-MIMO for up to 573.5 Mb/s wireless data rate

- Supported frequency bands (country-specific restrictions apply):
 - 2.400 to 2.4835 GHz
 - 5.150 to 5.250 GHz
 - 5.250 to 5.350 GHz
 - 5.470 to 5.725 GHz
 - 5.725 to 5.850 GHz
- Available channels: Dependent on configured regulatory domain
- DFA (Dynamic Frequency Adjustment) optimizes available channels and provides proper transmission power
- Transmit beam forming (TxBF) for increased signal reliability and range
- 802.11n/ac packet aggregation:
 - Aggregated Mac Protocol Data Unit (A-MPDU), Aggregated Mac Service Data Unit (A-MSDU)
- Supported data rates (Mbps):
 - 802.11b: 1, 2, 5.5, 11
 - 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54
 - 802.11n(2.4GHz): 6.5 to 300 (MCS0 to MCS15, HT20 to HT40), 400 with 256-QAM
 - 802.11n(5G): 6.5 to 600 (MCS0 to MCS31, HT20 to HT40)
 - 802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4 for VHT20/40/80), 2166 with Q024-QAM
 - 802.11ax(2.4GHz): 3.6 to 573.5 (MCS0 to MCS11, NSS=1 to 2, HE20 to HE40)
 - 802.11ax(5GHz): 3.6 to 2402 (MCS0 to MCS11, NSS=1 to 4, HE20 to HE160(80+80))
- Supported modulation types:
 - 802.11b: BPSK, QPSK, CCK
 - 802.11a/g/n/ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
 - 802.11n high-throughput (HT) support: HT 20/40
 - 802.11ac very high throughput (VHT) support: VHT 20/40/80
 - 802.11ax(HE): BPSK, QPSK, CCK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM
- Advanced Cellular Coexistence (ACC)

- Minimizes interference from 3G/4G cellular networks, distributed antenna systems, and commercial small cell/femtocell equipment.
- 1×BLE5/Zigbee (802.15.4) module, up to 6dBm transmit power(class 1), -93dBm RSSI. Hardware ready for Zigbee.

Interfaces

- 1× 10/100/1000/2500Mbps(RJ-45) port, Eth0, Power over Ethernet (PoE) 802.3bt/at compliant.
- 1× 10/100/1000Mbps(RJ-45) port, Eth1, up to 802.3at PSE in case of Eth0 802.3bt Type4 PoE input.
- 1×SFP. SFP module need to be purchased additionally.
- 1× USB 2.0 TypeC
- Reset button: Factory reset. Press reset button for 5s, AP LEDs will quickly flash for 3s, then AP will restart and restore factory configurations.

Visual Indicators (7 LEDs)

- For system and radio status
 - SYS: ON, Bootloader-OS loading and system running; Flashing, Bootloader-OS upgrading.
 - 2.4G: ON, 2.4GHz SSID created and running
 - 5G: ON, 5GHz SSID created and running
 - Eth0: ON, Ethernet0 linkup
 - Eth1: ON, Ethernet1 linkup
 - SFP ON: ON, SFP linkup
 - PSE: ON, PSE enabled

Security

Integrated Trusted Platform Module (TPM) for secure storage of credentials and keys.

Antenna

- AP361: Built-in 2×2:2 @ 2.4GHz, 4x4:4 @ 5GHz
 - Four integrated 5GHz omni antennas for 4x4 MIMO with peak

antenna gain 6.48dBi, two integrated 2.4GHz omni antennas for 2x2 MIMO with peak antenna gain 4.85dBi.

- AP361D: Built-in 2×2:2 @ 2.4GHz, 4x4:4 @ 5GHz
 - Four integrated 5GHz directional antennas for 4x4 MIMO with peak antenna gain 7.4dBi, two integrated 2.4GHz omni antennas for 2x2 MIMO with peak antenna gain 7.5dBi.
 - H80°x V80°
- AP361e: external antennas, 2×2:2 @ 2.4GHz, 4x4:4 @ 5GHz
 - 6* N femal connectors, built in 6KA antenna feeder lightning /port
 - ANT0-ANT3 are 5GHz band, ANT4-ANT5 support 2.4GHz band.
- Integrated BLE antenna
- Optional external antennas(sold additional)

Receive sensitivity (per chain)

	2.4 GHz	5 GHz
1 Mb/s	-99	
11 Mb/s	-89	
6 Mb/s	-93	-91
54 Mb/s	-76	-74
HT20 (MCS 0/8)	-92	-90
HT20 (MCS 7/15)	-74	-72
HT40 (MCS 0/8)	-91	-88
HT40 (MCS 7/15)	-74	-70
VHT20 (MCS 0)	-92	-90
VHT20 (MCS 8)	-70	-68
VHT40 (MCS 0)	-91	-88
VHT40 (MCS 9)	-68	-64
VHT80 (MCS0)		-86
VHT80 (MCS9)		-61
HE20 (MCS 0)	-94	-92
HE20 (MCS 11)	-63	-62
HE40 (MCS 0)	-91	-89
HE40 (MCS 11)	-62	-60
HE80 (MCS0)		-87
HE80 (MCS11)		-58

Maximum Transmit power (per

chain) ± 2dBm

	2.4 GHz	5 GHz
1Mb/s	22 dBm	
11Mb/s	22 dBm	
6Mb/s	22 dBm	21 dBm
54Mb/s	21 dBm	20 dBm
HT20 (MCS 0/8)	22 dBm	21 dBm
HT20 (MCS 7/15)	21 dBm	19 dBm
HT40 (MCS 0/8)	22 dBm	21 dBm
HT40 (MCS 7/15)	21 dBm	18 dBm
VHT20 (MCS 0)	22 dBm	21 dBm
VHT20 (MCS 8)	20 dBm	18 dBm
VHT40 (MCS 0)	22 dBm	21 dBm
VHT40 (MCS 9)	20 dBm	18 dBm
VHT80(MCS0)		21 dBm
VHT80 (MCS9)		18 dBm
HE20 (MCS 0)	22 dBm	21 dBm
HE20 (MCS 11)	20 dBm	17 dBm
HE40 (MCS 0)	22 dBm	21 dBm
HE40 (MCS 11)	20 dBm	17 dBm
HE80 (MCS0)		21 dBm
HE80 (MCS11)		17 dBm

Note: Maximum capability of the hardware provided (excluding antenna gain). Maximum transmit power is limited by local regulatory settings.

Power

- Supports Power over Ethernet (PoE)
- Maximum (worst case) power consumption:
 - ↪ 64W (802.3bt Type4 PoE, full functions, GE port supports 802.3at PSE)
 - ↪ 46W (802.3bt Type3 POE, GE port supports 802.3at PSE)
 - ↪ 24W (802.3at POE, USB disabled)
 - ↪ 10W (idle mode)

Mounting

- AP-MNT-OUT-H, for AP361, need to be ordered separately.
- AP-MNT-OUT, for AP361D, AP361e, AP271, Pole/Wall mounting, need to be ordered separately.

Environmental

- Operating temperature: -40°C to 65°C (-40°F to +149°F)
- Humidity: 5% to 95%
- Storage and transportation Temperature: -40°C to +85°C (-40°F to +185°F)
- Rating: IP67
- Wind resistance:
 - Up to 100MPH sustained winds
 - Up to 165MPH wind gusts

Dimensions/weight

- Single AP excluding packing box and accessories
 - ↪ 243mm (W) x 243mm (D) x 85mm (H)
 - ↪ 9.56" (W) x 9.56" (D) x 3.34" (H) / 2500g / 5.51lb
- Single AP including packing box and accessories
 - ↪ 320mm (W) x 300mm (D) x 135mm (H)
 - ↪ 12.6" (W) x 11.81" (D) x 5.31" (H) / 3121g / 6.88lb

Reliability

MTBF: 1,003,257 hours (114.5 years) at +25°C operating temperature

Capacity

- Up to 8 SSID/Radio (16 SSID/AP), hardware ready for 16 SSID per radio (32 SSID/AP)
- Support for up to 1024 associated client devices
- Up to 8k APs managed by HAN Networking Management Platform
- Up to 255 APs per Web managed (HTTP/HTTPS) cluster

Software feature

- Auto channel selection
 - Auto transmit power control
 - Bandwidth control per SSID
 - L2 roaming
 - L3 roaming with CSP
 - Captive Portal
 - Internal User Database
 - Radius Client
 - Wireless QoS
 - Band steering
 - Client smart load balance
 - Client sticky avoidance
 - User behavior tracking
 - White/black list
 - Zero-touch provisioning (ZTP) with support of third-party partner
 - NTP server client
 - ACL
 - Wireless MESH P2P/P2MP
 - Rogue AP location and containment
 - Wireless Attack Detection
 - System log report
 - SNMP Trap Notification with CSP/ESP
 - Floor plan and heat map with CSP/ESP
- Note: some features are limited by local regulatory settings

Authentication & Encryption

- 802.11i, Wi-Fi Protected Access 2 (WPA2), WPA, WPA3(WPA3 - Enterprise with CNSA Option, Personal(SAE), Enhanced Open(OWE))
- 802.1X
- Portal page authentication
- Advanced Encryption Standard (AES), Temporal Key Integrity Protocol (TKIP)

IEEE standard

- IEEE 802.11a/b/g/n/ac
- IEEE 802.11e WMM
- IEEE 802.11h, 802.11i, 802.11e QoS
- IEEE 802.11k Radio Resource

Management

- IEEE 802.11v BSS Transition

Management

- IEEE 802.11r Fast roaming

Regulatory & certification

- CB Scheme Safety, cTUVus
- WFA certified Wi-Fi 6
- WFA certified Passpoint R2
- CE
- FCC


- EN 60601-1-1 & EN 60601-1-2
- RoHS, REACH, WEEE
- EMI and susceptibility (Class A)
- 2014/35/EU Low Voltage Directive
- 2014/30/EU EMC Directive
- 2011/65/EU RoHS Directive
- 2014/53/EU Radio Equipment Directive
- EN 300 328
- EN 301 893
- EN 301 489-1
- EN 301 489-17

- EN 55032
- IEC/EN 60950 and 62368
- Wi-Fi Alliance (WFA) certified Wi-Fi 6, Enhanced Open (OWE)
- Wi-Fi Alliance (WFA) certified Passpoint R2
- SRRC
- WAPI


Ordering information

Item	Description
AP361	Outdoor Enterprise Wi-Fi 6 (802.11ax) AP, 2.4GHz 2*2:2 + 5GHz 4*4:4, 1*Full band dedicated scanning, 1*BLE5, 1*2.5GbE, 1*GbE, 1*SFP, 1*USB, integrated omni antennas. Default shipping without mounting kit.
AP361D	Outdoor Enterprise Wi-Fi 6 (802.11ax) AP, 2.4GHz 2*2:2 + 5GHz 4*4:4, 1*Full band dedicated scanning, 1*BLE5, 1*2.5GbE, 1*GbE, 1*SFP, 1*USB, integrated directional antennas. Default shipping without mounting kit.
AP361e	Outdoor Enterprise Wi-Fi 6 (802.11ax) AP, 2.4GHz 2*2:2 + 5GHz 4*4:4, 1*Full band dedicated scanning, 1*BLE5, 1*2.5GbE, 1*GbE, 1*SFP, 1*USB, 6*Nf connectors. Default shipping without mounting kit.
AP-MNT-OUT-H	Outdoor AP mounting kit, hanging installation, independent packing. Suitable for AP361.
AP-MNT-OUT	Outdoor AP mounting kit, pole/wall installation, angle adjustable, independent packing. Suitable for AP361D, AP361e, AP271.


Figure 1. AP361 antenna pattern plots
Azimuth plane (top view) - 2.4GHz

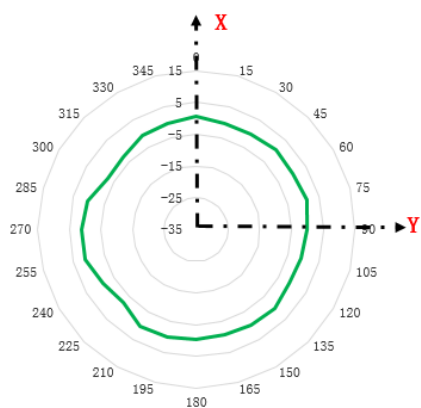


Azimuth plane (top view) - 5GHz

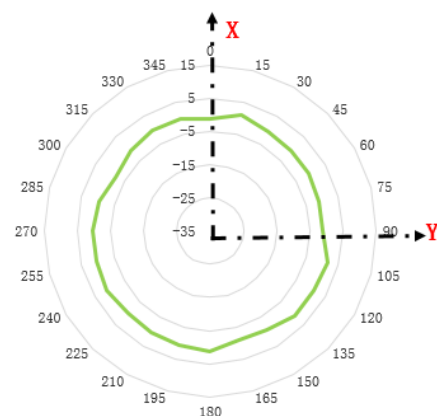


Elevation plane (side view,0 degrees)-2.4GHz

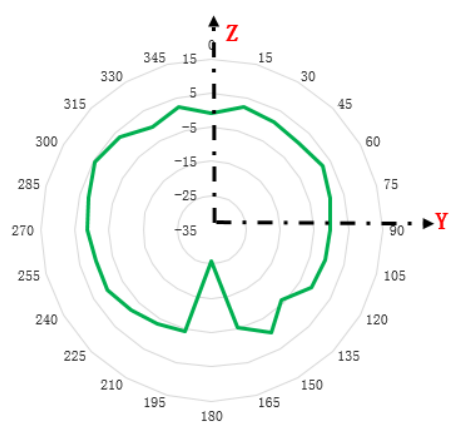


Elevation plane (side view,0 degrees)-5GHz

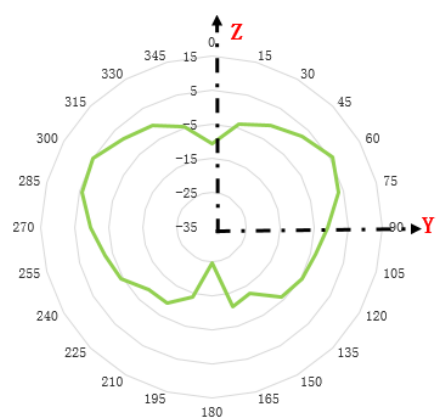

Elevation plane (side view,90 degrees)-2.4GHz

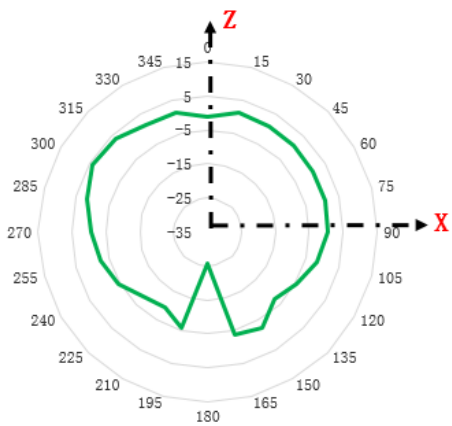

Elevation plane (side view,90 degrees)-5GHz

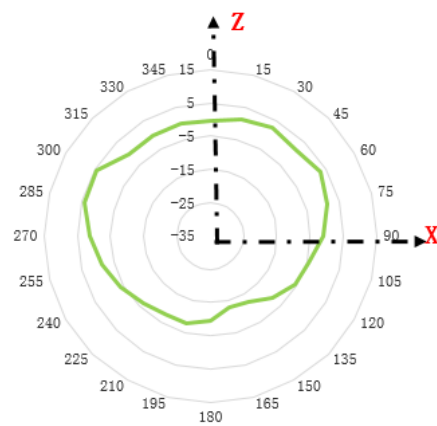


— Combined


图 2. AP361D 天线向量图

Horizontal or Azimuth plane (top view)


Azimuth plane (top view) - 2.4GHz

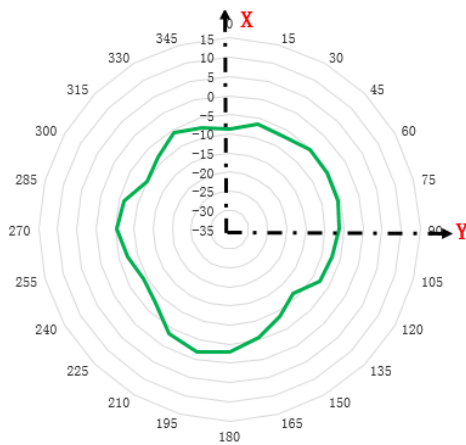


Azimuth plane (top view) - 5GHz

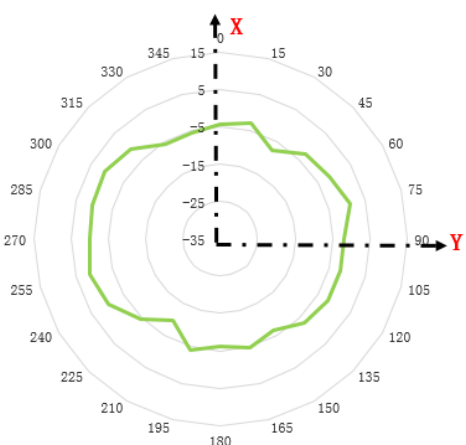


Elevation plane (side view,0 degrees)-2.4GHz

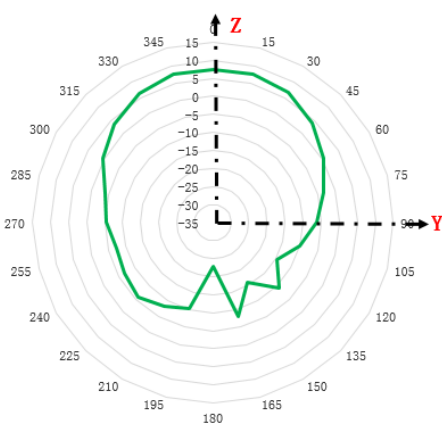


Elevation plane (side view,0 degrees)-5GHz

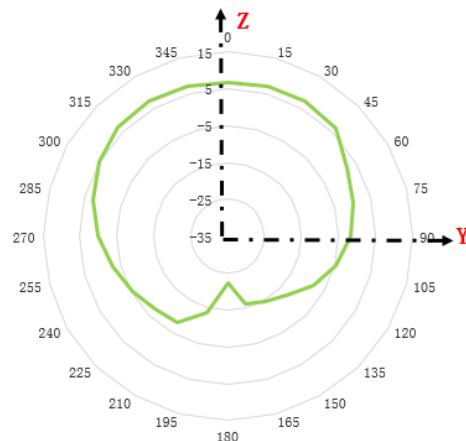

Elevation plane (side view,90 degrees)-2.4GHz

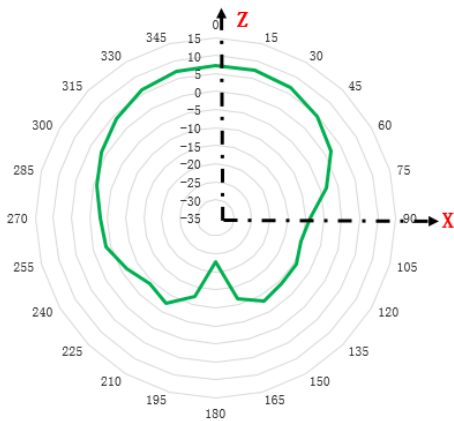

Elevation plane (side view,90 degrees)-5GHz

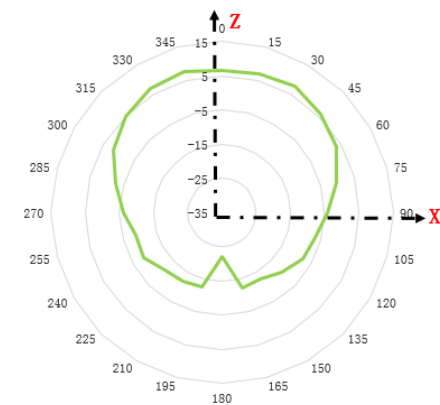

Combined

图 3. BLE 天线向量图

